

*Uni Freiburg, Web Science Group*  
*Prof. Peter Fischer*  
*Systems Infrastructure for Data Science - Winter 2014/15*

Exercise Sheet #3: Multi-Dimensional Indexing

Due/discussion: Nov 13, 2014

### Exercise 4.1 : Key Concatenation

Instead of creating a multi-dimensional index, one idea is to use a conventional B<sup>+</sup>-Tree where the key is the concatenation of the keys for each dimension. Suppose we create one such index on the following two attributes of a sales table: **month** and **salesperson** (in this order). Consider the following queries:

1. What amount has been sold by Al Bundy in September/2014?
2. How many soccer balls have been sold in July/2014?
3. How many soccer balls have been sold by Alice in all of our history?

**Which of these queries may benefit from the index we have created? Explain your answer.**

### Exercise 4.2 : R-Tree, k-d Tree and Point Quad Tree

- A. **R-Tree:** Consider an R-Tree with order  $d=2$  where node capacity for such an R-Tree is  $2d=4$  and minimum occupancy is  $d=2$ . Assume that the database contains following rectangles:

Rectangle	Lower Corner (X,Y)	Upper Corner (X,Y)
1	(1,1)	(4,5)
2	(3,2)	(7,4)
3	(6,2)	(8,5)
4	(6,7)	(8,9)
5	(7,11)	(9,13)
6	(8,10)	(12,14)
7	(11,12)	(14,15)

The R-Tree for this database is shown in Figure 1:

Using the heuristics for insertion and node-splitting (*minimum necessary region enlargement* and *minimum totally covered area*) mentioned in the lecture, insert the following rectangles into the R-tree. Show the steps during insertion and draw the resulting R-tree.

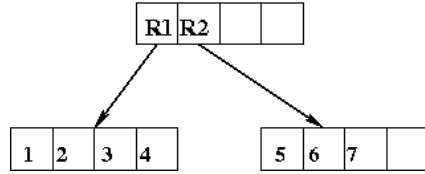


Figure 1: R-Tree with  $d=2$

Rectangle	Lower Corner (X,Y)	Upper Corner (X,Y)
8	(6,3)	(9,6)
9	(4,10)	(6,13)

B. **k-d Tree:** Insert the following points in given order into an initially empty point quad Tree:

(20,40), (10,50), (35,25), (30,20), (40,10), (25,15)

Show intermediate steps, the resulting quad Tree and the n-dimensional partitioning figure.

C. **Point Quad Tree:** Repeat part B. for a point k-d tree.